



**Culligan
Medallist
Plus®
Iron-OX5™
Filter
Owners
Guide**





Contents

The filter warranty is located on [page 18](#) of this Owners Guide.

About This Manual.....	4
Thank You.....	5
Specifications	6
Application	7
Operation.....	8
Programming.....	9
Error Codes	11
When & How to Bypass Your Water Filter	13
Things to Check Before You Call For Service	14
Care and Cleaning of Your Water Filter	15
Performance Data Sheet.....	16
Records and Data.....	17
Culligan Limited Warranty	18



Attention Culligan Customer

We encourage Culligan users to learn about Culligan products, but we believe that product knowledge is best obtained by consulting with your Culligan dealer. Untrained individuals who use this manual assume the risk of any resulting property damage or personal injury.



WARNING! Electrical shock hazard! Prior to servicing equipment, disconnect power supply to prevent electrical shock.



WARNING! If incorrectly installed, operated, or maintained, this product can cause severe injury. Those who install, operate, or maintain this product should be trained in its proper use, warned of its dangers, and should read the entire manual before attempting to install, operate, or maintain this product. Failure to comply with any warning or caution that results in any damage will void the warranty.



CAUTION! This product is not to be used by children or persons with reduced physical, sensory or mental capabilities, or lack of experience or knowledge, unless they have been given supervision or instruction.



CAUTION! Children should be instructed not to play with this appliance.



CAUTION! If the power cord from the power supply to the unit looks or becomes damaged, the cord and power supply should be replaced by a Culligan Service Agent or similarly qualified person in order to avoid a hazard.



CAUTION! To reduce the risk of fire, use only No. 26 AWG or larger telecommunications line cord.

NOTE! This system is not intended for use with water that is microbiologically unsafe or of unknown quality without adequate disinfection either before or after the system.

Products manufactured and marketed by Culligan International Company (Culligan) and its affiliates are protected by patents issued or pending in the United States and other countries. Culligan reserves the right to change the specifications referred to in this literature at any time without prior notice. Culligan, Aqua-Sensor, Tripl-Hull, and SoftMinder are trademarks of Culligan International Company or its affiliates.

Culligan International Company

9399 West Higgins Road, Suite 1100
Rosemont, Illinois 60018
1-847-430-2800
www.culligan.com



About This Manual

This manual:

- Familiarizes the operator with the equipment
- Explains installation and setup procedures
- Provides basic programming information
- Explains the various modes of operation
- Gives specifications and troubleshooting information

Read this Manual First

Before you operate the Culligan Medallist Plus Iron-OX5™ water filter system, read this manual to become familiar with the device and its capabilities.

Installation or maintenance done on this system by an untrained service person can cause major damage to equipment or property damage. Not adhering to the recommended service/maintenance can cause damage to equipment or property damage.

Safe Practices

Throughout this manual there are paragraphs set off by special headings.

Note

Note is used to emphasize installation, operation or maintenance information which is important, but does not present any hazard. For example,

NOTE! The clamp and valve will be able to rotate on the tank until pressure is applied.

Caution

Caution is used when failure to follow directions could result in damage to equipment or property. For example,



CAUTION! Disassembly while under water pressure can result in flooding.

Warning

Warning is used to indicate a hazard which could cause injury or death if ignored. For example,



WARNING! Electrical shock hazard!
Unplug the unit before removing the timer mechanism or cover plates!

The CAUTION and WARNING paragraphs are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and careful attention are conditions which cannot be built into the equipment. These MUST be supplied by the personnel installing, operating, or maintaining the system.

Be sure to check and follow the applicable plumbing codes and ordinances when installing this equipment.

Use protective clothing and proper face or eye protection equipment when handling chemicals or power tools.

Serial Numbers

The control valve serial number is located on the back of the enclosure.

The media tank serial number is located on the top surface of the tank.

This publication is based on information available when approved for printing.

Continuing design refinement could cause changes that may not be included in this publication.

NOTE! Do not remove or destroy the serial number.
It must be referenced on request for warranty repair or replacement.



Welcome To Your New World of Better Living with Culligan Water.

The Culligan® Medallist Plus Iron-OX5™ filter system has been tested and certified by WQA against NSF/ANSI Standard 372, CSA B483.1, and NSF/ANSI Standard 42 for the effective reduction of iron up to 500 gallons as verified and substantiated by test data.

The Culligan® Outdoor Medallist Plus Iron-OX5™ filter system has been tested and certified by WQA against NSF/ANSI Standard 372 and NSF/ANSI standard 42 for the effective reduction of iron up to 500 gallons as verified and substantiated by test data.

For installations in Massachusetts, the Massachusetts Plumbing Code 248 CMR shall be adhered to. Consult your licensed plumber for installation of this system. This system and its installation must comply with state and local regulations. The use of saddle valves is not permitted.

The Culligan® Medallist Plus Iron-OX5™ water filter system is designed to meet the needs of applications for high quality water. This manual contains important information about the unit, including information needed for installation, operating, and maintenance procedures. A troubleshooting section provides a guide for quick and accurate problem solving.

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.



CAUTION! This system is to be supplied with cold water only.

Installation or maintenance done on this system by an untrained service person can cause major damage to equipment or property damage. Not adhering to the recommended service/maintenance can cause damage to equipment or property damage.

If this is your first experience having filtered, conditioned water in your home, you'll be amazed at the marvelous difference it makes. We promise that you'll never want to be without it again.

Congratulations, too, on selecting one of the "first family" of water filters in the prestigious Culligan Medallist Series. With Culligan's many years of knowledge and experience in water treatment, you can be confident that the model you selected has been designed and engineered to provide years of service with a minimum of care and attention.

Products manufactured and marketed by Culligan International Company (Culligan) and its affiliates are protected by patents issued or pending in the United States and other countries. Culligan reserves the right to change the specifications referred to in this literature at any time, without prior notice. Culligan, Culligan Medallist Series, Cullar, Filtr-Clear, Cullneu, AccuSoft, Culligan Man and www.culligan.com are trademarks of Culligan International Company or its affiliates.



C US



Thank You



Specifications

Culligan Medallist Plus Iron-OX5 Filter

	10" Iron-OX5
Control Valve	1" reinforced thermoplastic
Overall Conditioner Height	67"
Media Tank Dimensions (D x H)	10" x 54" tank
Filter Media Type	1.0 cu. ft. Birm
Underbedding	
G-50	35 lbs.
Cullsan U	25 lbs.
Capacity ¹	500 gallons
Freeboard ²	21"
Max. Clear Water (Soluble) Iron	5 ppm
Minimum Alkalinity	100 ppm
pH for Iron Removal ³	7.0 - 8.5
Service Flow @ Pressure Drop (Clean Bed)	
Normal	4 gpm @ 5 psi
Maximum ⁴	6 gpm @ 9 psi
Operating Pressure	20-60 psi
Operating Temperature	33-120° F (1-48° C)
Electrical Requirements	28 Volts/50-60 Hz
Power Consumption, Continuous/Maximum	3 Watts/21.6 Watts
Drain Flow	5.5 gpm
Reconditioning Time	
Backwash	15 minutes
Air Draw	40 minutes
Fast Rinse	5 minutes

¹ Capacity based on 4 gpm and 5 mg/L of dissolved iron.

² Measure from top of media bed to top of inlet fitting.

³ Not recommended for Hydrogen Sulfide removal.

⁴ Max flow rates and pressure drop characteristics have not been validated by the Water Quality Association. The maximum specified flow rate at which the system will deliver treated water, as validated by the Water Quality Association, is defined as service flow.



Water Quality

Verify that raw water iron, pH, and alkalinity levels are within recommended limits.

Iron—A Common Water Problem

The chemical/physical nature of iron found in natural water supplies is exhibited in four general types:

1. **Ferrous Iron** - also referred to as “dissolved iron” or “clear water” iron. The Iron-OX5 is rated to remove up to 5 ppm of this type of iron. If a glass is filled with water containing ferrous iron the water will initially be clear. Upon standing and being exposed to air the water will gradually turn cloudy and colored as the ferrous iron oxidizes to ferric iron.
2. **Particulate Iron**—Also called ferric iron. This type of iron is an undissolved particle of iron. The Iron-OX5 filter will effectively remove these particles but it is not the intended design of the system.
If there is a significant amount of ferric iron additional filtration treatment may be required prior to the Iron-OX5.
3. **Organic Bound Iron**—This type of iron is strongly attached to an organic compound in the water. The oxidation / filtration process used in the Iron-OX5 will not remove this type of iron.
4. **Bacterial Iron and Colloidal Iron**—These types of iron, like organic bound iron will not be removed by the Iron-OX5 filter.

Principles of Operation - Iron-OX5 Aeration System

The Culligan Iron-OX5 system utilizes the principle of oxidation to convert ferrous iron to ferric iron, resulting in removal of the iron as a filterable particle. The process is accomplished by water entering the filter tank being immediately exposed to an “airhead” at the top of the filter tank to begin the oxidation process. The filter media acts as a catalyst to help complete the oxidation reaction and retain the precipitated iron. Periodic reconditioning purges the accumulated iron particles from the filter tank and re-classifies the media bed.

After the backwash cycle the Iron-OX5 control valve replenishes the airhead in the filter tank during the “Air Draw” cycle. During this cycle air is educted into the filter tank in sufficient volume for the required airhead. During the “Rinse” cycle the air charge is compressed and stored within the filter tank and the filter media is rinsed prior to the system returning to the service cycle.



CAUTION! Do not use where the water is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the unit.

Pressure - Although the system is designed and tested to operate at a maximum pressure of 60 psi, it is not expected that the system should be exposed to such pressure for extended operation. Culligan recommends following the IAPMO Uniform Plumbing code section 806.2 by installing a Pressure Regulating Valve if the water pressure is greater than 60 psi. Operating on pressures above the UPC for extended periods of time can increase the service frequency and failure of replacement parts. On a private water system, make sure the minimum pressure (when the pump starts) is greater than 20 psi (140 kPa).



CAUTION! The use of a pressure reducing valve may limit the flow of water in the household.

Temperature - Do not install the unit where it might freeze, or next to a water heater or furnace or in direct sunlight. Outdoor installations require the use of the Outdoor Iron-OX5 filter system. Indoor systems installed outdoors will void the warranty and UL certification.

Application



Operation

Reconditioning Cycle

There are several conditions that will cause the control to initiate a reconditioning cycle. The “REG” enunciator will light when the control has signaled for a reconditioning cycle. The “REG” enunciator will flash while the control is in a reconditioning cycle. The following are conditions that will call for reconditioning, assuming “dip 2” has been set to “DEL”:

1. When the time clock has counted past the set number of days.
2. At the preset time, after the “REG” button is depressed once. “REG” will light.
3. Immediately, when the “REG” button is depressed for three seconds. “REG” will light and blink.
4. Immediately, if power to the unit has been off for more than 3 hours and time of day has been returned.
5. When the flow meter has recorded the passage of a predetermined number of gallons.

If “Dip Switch 2” is set to “Immediate”, the unit will begin a reconditioning cycle immediately for instances 2 and 4. With “Dip Switch 2” set to “Delayed”, the reconditioning cycle will not begin until the preset reconditioning time.

NOTE! If set to immediate mode as timeclock, the unit will initiate the reconditioning cycle at 12:00 AM. In the delay mode, “REG” indicator will light at 12:00 AM and reconditioning cycle will occur at programmed delayed time.

Display Lockout

The Culligan Medallist Series™ control is equipped with a feature which will allow you to protect the programmed settings from tampering by unauthorized individuals. When the lockout feature is activated, the only parameters which can be adjusted are the Time-of-Day and the Time of Reconditioning Cycle. Refer to the “Setting of the Microprocessor” for activating this feature.

Power Loss

The AccuSoft® circuit board is equipped with a Hi-Cap Capacitor and EEPROM memory chip. The capacitor is capable of maintaining the time, for at least two days, in the event of a power outage. The EEPROM ensures that the individual programming parameters of the filter are retained.

If the power outage lasts long enough to drain the Hi-Cap Capacitor, the control will flash “12:00 PM” when power is returned to the control. The unit will continue to keep time from the moment power is restored, and will initiate a full reconditioning cycle at the preset reconditioning time. The time of day will need to be reset in order to return the reconditioning cycle to its preset time.

Installing the optional battery back-up onto the circuit board will ensure the correct time of day is retained in the event of power outages lasting longer than two days.

Service

The Culligan Medallist Series® water filter is equipped with a self diagnostic program to insure optimal operation of your water filter. Should service become necessary, a phone icon will appear in the display. If this condition occurs, call your local Culligan Dealer for assistance. The phone icon and error code will be the only items displayed when service is required on the control.



Programming

The DEFAULT programming menu for a Medallist Filter is outlined in the following table:

Setting	Display	Range Limits	Default	Comments
Time of Day	<i>tod</i> 12:00	12:00 AM - 11:59 PM (12hr) 00:00 - 23:59 (24hr)	12:00 PM 12:00	12 / 24 hour function set with dip #6
*Time of Reconditioning Cycle	<i>tor</i> 2:00	12:00 AM - 11:30 PM (12hr) 00:00 - 23:30 (24hr)	2:00 AM 02:00	- Adjust time in 30 minute increments only
*Cycle 1 time	<i>buu</i> 10	01 - 99 minutes	10 minutes	-Always active in Time Clock Mode
*Cycle 2 time	<i>br</i> 02	01 - 99 minutes	- Filter - 02 minutes	-Always active in Time Clock Mode
*Cycle 3 time	<i>Fr</i> 10	01 - 99 minutes	10 minutes	-Always active in Time Clock Mode (Filter)
*Reconditioning Cycle Interval	<i>dAY</i> 03	Days - 01 to 99 days	03 days	
*Gallons Capacity	<i>CAPG</i> 0870	1 - 9,999	870	Active if flow meter is connected to circuit board

Hidden Programming Menu

(Accessed from service mode by holding the "+" key for 5 seconds)

*Delay / Immediate	<i>dEL</i> 1d	Toggle Delay or Immediate	Delay	- Locks in a regen signal after a 3 hour or more power outage; regen can be set to go immediate or delay until the tor; - Only accessible from service mode, time of day display, by pressing and holding "+" for 5 seconds - (not in programming menu)
*Lock / Unlock	<i>Loc</i> UnL	Toggle Lock & Unlock	Unlock	- Lock or unlock access to make program changes - Only accessible from service mode, time of day display, by pressing and holding "+" for 5 seconds - (not in programming menu)

• To be saved in EEPROM

Make sure inlet water supply is turned off to unit by placing it on bypass, then supply power to the timer. The display will power up flashing "12:00 PM" and the motor will energize and cycle the control, without stopping to the home position. This is required to ensure that the control is in the home position.

NOTE! IMPORTANT! Connect the flow meter to Accusoft circuit board prior to making any programming adjustments.



The timer uses four buttons:

Button	Description
Set-up / Enter Key (Status)	Advance timer through display options
Reconditioning Cycle Key (REGEN)	Initiate a reconditioning cycle
Toggle Down Key ("-")	Decrease the setting
Toggle Up Key ("+")	Increase the setting

Time of Day

This setting is used to program the current time of day. When in this step, the display will first show "tod" for two seconds.

After "tod" is displayed, "12:00 PM" will display (or the current set time if already programmed) and the minutes will flash.

- The minutes are adjusted with the "+" or "-" key until the correct value is displayed.
- Press the "Regen" key to flash the hours. Adjust with the "+" or "-" key until the correct time is displayed.

Pressing the "Status" key will move to the next programming step. Pressing "Regen" will move back to the minutes adjust.

Time of Reconditioning Cycle

This setting is used to program the time at which a reconditioning cycle is to occur in the delay mode, or in immediate mode with time clock backup on. The display will first show "tor" for two seconds.

After "tor" is shown the display will then show the default of 2:00 AM (or the current programmed time of reconditioning if already set). The time can be adjusted in 30 minute increments by pressing the "+" or "-" keys.

Pressing the "Status" key will save the setting and move to the next programming step.

Reconditioning Cycle Interval


This setting is used to set the days between reconditioning in time clock mode. The display will show "REG" icon and "tcb" for two seconds and then display the numbers to change. Adjust the value with the "+" or "-" keys.

Pressing the "Status" key will save the setting and move to the next programming step. The reconditioning cycle interval is 3 days for the Iron-OX5 filter system.

Backwash Time

This setting is used to program the cycle 1 backwash time. The time of the cycle is displayed in minutes. The display will show "buu" in the display for two seconds and then the cycle time in the right most digits. Adjust the value with the "+" or "-" keys. The backwash cycle time for Iron-OX5 filter system is 15 minutes.

Pressing the "Status" key will save the setting and move to the next programming step.

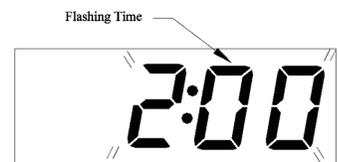



Error Codes

Air Draw Time

This setting is used to set the time in minutes for cycle 2. This setting is used for the eduction of air (rather than brine) to create the air head that oxidizes iron within the filter tank. The display will show “br” in the left most digits and the cycle time in the right most digits. Adjust the value with the “+” or “-” keys. The Air Draw Time for the Iron-OX5 filter system is 40 minutes.

A rectangular digital display showing the text "br 40" in a black, segmented font. The "br" is on the left and "40" is on the right.

Pressing the “Status” key will save the setting and move to the next programming step.

Fast Rinse Time

This setting is used to set the time in minutes for cycle 3. The fast rinse setting settles and compacts the media after backwashing, flushing any residual iron from the bottom of the filter bed and compressing the air charge before returning the filter to the SERVICE position. The display will show “Fr” in the left most digits and then the cycle time in the right most digits. Adjust the value with the “+” or “-” keys. Pressing the “Status” key will save the setting and move to the next programming step. The Fast Rinse Time for the Iron-OX5 filter system is 5 minutes.

A rectangular digital display showing the text "Fr 5" in a black, segmented font. "Fr" is on the left and "5" is on the right.

Gallons Capacity Setting

The default gallons capacity setting is 870 gallons. The Iron-OX5 system is rated to remove 5 ppm for up to 500 gallons before requiring a reconditioning cycle. Average water usage is estimated to be 50 gallons-per-day for each occupant in a residence. Adjust the gallons capacity setting accordingly based on the number of occupants for high iron levels if the rated capacity will be exhausted prior to the 3-day interval.

A rectangular digital display showing the text "REG CAPG" in a black, segmented font. "REG" is on the left and "CAPG" is on the right.

A rectangular digital display showing the text "REG 0870" in a black, segmented font. "REG" is on the left and "0870" is on the right.

Blank Display

After the last programming menu is displayed (menu will vary depending on mode of operation), pressing status will move to a blank display screen. From the 'blank display', pressing the “+” key from the blank display will enter the diagnostics menu. From the 'blank display', pressing the “-” key will enter the statistics menu. From the 'blank display', pressing the “Status” key will exit programming mode and return to the service mode time display. The “regen” key is ignored while in the 'blank display'.

Hidden Programming Menu

(Accessed from the regular time of day display in service mode by holding the “+” key for 5 seconds).



Immediate Reconditioning Cycle Override

This setting is used to determine whether an immediate or delayed reconditioning cycle should occur after a power outage greater than 3 hours. It applies only when dip #2 is set for "delay". The display will show the REG icon and "dEL" or "ld" depending on the last saved setting (default to "dEL" if EEPROM has no saved value). Toggle between "dEL" and "ld" with the "+" or "-" key.

If set to "dEL", then after power outage greater than 3 hours the "regen" icon will light and the reconditioning cycle will begin when the timer reaches the next programmed time of reconditioning.

If set to "ld", then after a power outage greater than 3 hours the reconditioning cycle will begin as soon as the control completes the homing cycle.

Pressing the "Status" key will save the setting and go to the next Hidden Menu set.

Screen Locking

This setting is used to lock out the user from changing most of the program menu settings. When the "Loc" setting is saved, the only program menus that can be changed are "tod" and "tor". The program menu settings will appear as normal but their values will not be able to be changed. (Note: The hidden menu can always be accessed and settings within the hidden menu can always be changed, even if "locked".)

The display will show "Loc" or "UnL" depending on the last saved setting (default to "UnL" if EEPROM has no saved value). Toggle between "Loc" and "UnL" with the "+" or "-" keys.

Pressing the "Status" key will save the setting, exit the Hidden Menu and return to the regular time of day Service Mode display.





When & How to Bypass Your Water Filter

Normally, all water except the outside faucet lines and irrigation system water passes through the water filter. There are times when the water filter should be bypassed, Cul-Flo-Valv® Bypass, or a 3-way bypass valve. You should bypass:

- If lines to outside faucets do not bypass the water filter, and you do not want to waste filtered water on lawn sprinkling or other outside uses.
- If you are going away on vacation and want to save water by not having the unit recharge while you're away.


Medallist Plus Series Bypass Valve

Culligan Bypass Valve

In the back of Culligan water filters is a Cul-Flo-Valv® Bypass. To bypass unit, simply turn the blue knob clockwise. To return to filtered water service, reverse the procedure—turn the blue knob counter-clockwise.

To BYPASS,
turn the blue knob clockwise
(see directional arrow on end of knob)
until the knob stops as shown.


DO NOT OVERTIGHTEN!

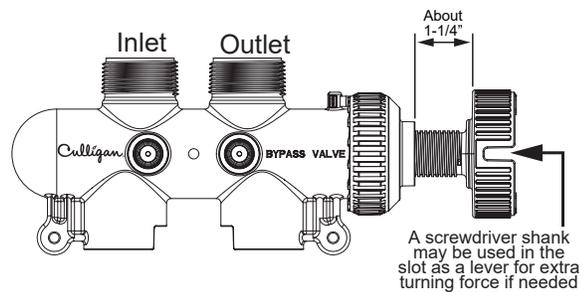

Bypassed

To return to SERVICE,
turn the blue knob counter-clockwise
(see directional arrow on end of knob)
until the knob stops as shown.

DO NOT OVERTIGHTEN!

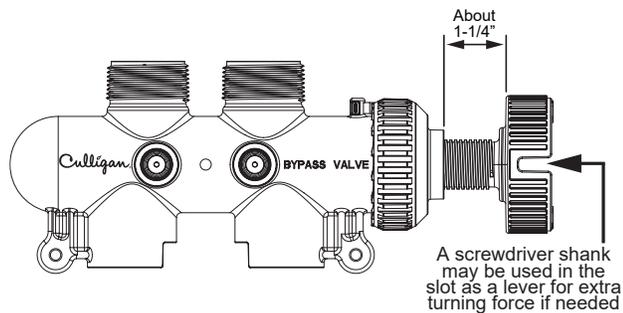

Filtered Water



Things to Check Before You Call For Service

If you unexpectedly experience iron staining or rusty water, make these simple checks before calling your Culligan dealer. One of the following conditions may be the reason for your change in water quality.

Important

If any of the following conditions is found, the water filter should be manually recharged after you have corrected the problem.

Power Supply

Check your power supply cord. Is it plugged fully into the electric outlet? Be certain that the outlet is not controlled by a wall switch which has been turned off. If power was interrupted it may be necessary to reset the control to correct time of day.

Tripped Circuit Breaker

Check the house circuit breaker panel or fuse box. Reset an open circuit breaker or replace a blown fuse if that circuit provides power to the filter system.

Power Failure

Any interruption in your power supply or time changes - such as daylight savings - will disrupt your filter's recharge schedule by causing the timer to run off-schedule. Reset timer to proper time of day.

Bypass Valves

Check to see if they are in the proper position. Cul-Flo-Valv® Bypass, if used, should be in the "Service" (handle stem screwed out) position. If hand valves are used, see that inlet and outlet valve are opened and that the bypass valve is closed.

No Water


If you aren't getting any water flow at all, make sure your water supply is working. Open a tap ahead of the filter (outside tap) to see if you have any water pressure. If you have water pressure, check the bypass valve. If it is in the Service position, put it into the bypass and call your Culligan dealer for service.

Increased Usage

Guests, family additions, new water-using appliances, etc., all will result in more water usage and will require more capacity from your filter. You can reprogram your recharging schedule by following the directions [page 8](#). Call your Culligan dealer for advice and save a service call.

Outdoor Electrical and Power Supply

- The Installer should set the Media tank on a solid, level surface near plumbing, drain, and electrical connections. The Media tank and plumbing should be secured so the system can't be knocked over.
- The customer should provide a GFCI electrical outlet suitable for outdoor use that is NOT controlled by a switch that can be turned off accidentally.
- For outdoor installation, only use an outdoor rated power supply.
- Power supply MUST be mounted on the wall at least 1 foot above ground level.
- Properly ground to conform with all governing codes and ordinances.
- Observe all state and local electrical codes.
- P/N 01031826 plug-in power supply is rated for indoor installations only, do not use for outdoor installation.
- P/N 01033178 plug-in 30-foot power supply is rated for outdoor installations (not included).
- For Outdoor use with a UL Listed Class 2 Direct Plug-in Power Unit only.

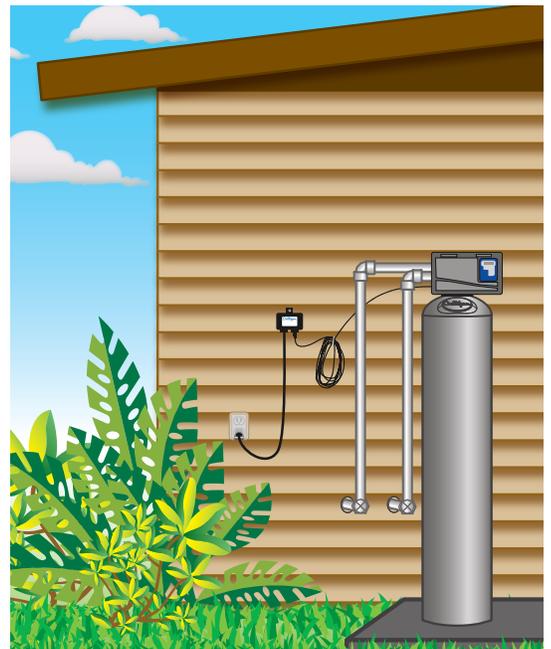



Care and Cleaning of Your Water Filter

Following these simple precautions will help assure continued trouble-free service and keep your Culligan Water Filter looking like new for years.

- Use only mild soap and warm water when cleaning the exterior of the conditioner. Never use harsh, abrasive cleaning compounds or those which contain acid, such as vinegar, bleach and similar products.
- **Important:** Protect your water filter and the entire drainline from freezing temperatures. **DANGER! If your unit should freeze, do not attempt to disassemble it. Call your Culligan Dealer.**
- **Important:** Culligan water filters are sold for use on potable water, only. If at any time the water becomes contaminated, such as during a “boil water” situation, the operation of the water filter should be discontinued until it is verified that the water is again potable. To do this, turn the knob on the bypass valve to the bypass position. Then, call your Culligan dealer to have your system sanitized before it is placed back into service.
- Should service, adjustment or trouble-shooting information be needed which is not covered in the Use and Care Guide, call your Culligan Dealer.

If you have further questions, please call your local independently operated Culligan dealer. He or she will be glad to be of assistance to you.



Performance Data Sheet

Culligan Medallist Plus® Iron-OX5 Filter

Important Notice — Read this data sheet and compare the capabilities of the unit to your actual water treatment needs. Culligan recommends that you have your water supply tested to determine these needs before purchasing a water treatment unit.

Culligan knows the more informed you are about your water treatment system, the more confident you will be about its performance. It's because of this and more than seventy years of commitment to our customers that Culligan is providing this Performance Data Sheet to its customers.

Manufacturer Culligan International Company
 9399 W. Higgins Rd., Suite 1100, Rosemont, IL 60018 USA
 1-800-CULLIGAN or 1-847-430-2800
www.culligan.com

Substance Reduction

This system has been tested according to NSF/ANSI Standard 42 for the reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI Standard 42.

While testing was performed under standard laboratory conditions, actual performance may vary.

Substance	Influent Challenge Concentration	Reduction Requirement	Average Reduction Percentage
Iron	3.0-5.0 mg/L ± 10%	0.03 mg/L	98.5%

Capacity: 500 gallons
 Flow Rate: 4 gpm
 Rated Pressure Drop: 4 gpm @ 5.0 psi

Operating Conditions

Water Pressure Limits: 20 - 60 psi (140 - 414 kpa)
 Temperature Limits: 33 - 120° F (1 - 50° C)
 Electrical Characteristics: 120V/ 60 Hz, 35 Watts

The Culligan® Medallist Plus Iron-OX5™ filter system has been tested and certified by WQA against NSF/ANSI Standard 372, CSA B483.1, and NSF/ANSI Standard 42 for the effective reduction of iron up to 500 gallons as verified and substantiated by test data.



C US

The Culligan® Outdoor Medallist Plus Iron-OX5™ filter system has been tested and certified by WQA against NSF/ANSI Standard 372 and NSF/ANSI standard 42 for the effective reduction of iron up to 500 gallons as verified and substantiated by test data.



Performance Indicator: If water flow decreases or a noticeable taste change occurs, the filter should be reconditioned. If conditions do not improve, contact your local Culligan Man. He can determine if your filter requires servicing. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Reconditioning cycle Frequency: Reconditioning frequency is recommended every three days but can vary with local water conditions.

Refer to the Installation and Operation Instructions, Parts List and Printed Warranties for more specific product information. To avoid contamination from improper handling and installation, your system should only be installed and serviced by your Culligan Man. Performance will vary based on local water conditions. The substances reduced by this product are not necessarily in your water.

Buyer Signature _____ Date _____

Seller Signature _____ Date _____



Records and Data

Important Data on Your Water Filter

It is advisable to have the salesperson or installer fill in the information below for your future reference. If this has not been done, please ask for it, as it is necessary if you contact your dealer.

Identification

Model Name _____ Catalog No. _____

Control Model No. _____ Control Serial No. _____

Date of Installation _____ Tank Serial No. _____

Settings

Time of Recharge: _____ a.m. _____ p.m.

Reconditioning cycle Interval _____ days (Time Clock Back-Up (tcb))

Gallons to signal _____ gallons capacity (CAPG)

Number of people in household _____

Water Analysis

Total Alkalinity _____ (gpg) Total Iron _____ ppm pH (acidity) _____

Other _____



**Culligan
Limited
Warranty**

Culligan Medallist and Medallist Plus® Automatic Water Filters

You have just purchased one of the finest water filters made. As an expression of our confidence in Culligan International Company products, your water filter is warranted to the original end-user, when installed in accordance with Culligan specifications, against defects in material and workmanship from the date of original installation, as follows:

For a period of ONE YEAR	The entire filter
For a period of FIVE YEARS	The AccuSoft® circuit board, or Soft-Minde® meter, if so equipped.
For a period of TEN YEARS	The control valve body, excluding internal parts. The filter tank

If a part described above is found defective within the specified period, you should notify your independently operated Culligan dealer and arrange a time during normal business hours for the dealer to inspect the water filter on your premises. Any part found defective within the terms of this warranty will be repaired or replaced by the dealer. You pay only freight from our factory and local dealer charges.

We are not responsible for damage caused by accident, fire, flood, freezing, Act of God, misuse, misapplication, neglect, oxidizing agents (such as chlorine, ozone, chloramines and other related components), alteration, installation or operation contrary to our written instructions, or by the use of accessories or components which do not meet Culligan specifications, is not covered by this warranty. Refer to the specifications section in the Installation and Operating manual for application parameters.

Our product performance specifications are furnished with each water filter unit. To the extent permitted by law, Culligan disclaims all implied warranties, including without limitation warranties of merchantability and fitness for particular purpose; to the extent required by law, any such implied warranties are limited in duration to the one-year period specified above for the entire conditioner. As a manufacturer, we do not know the characteristics of your water supply or the purpose for which you are purchasing a water filter. The quality of water supplies may vary seasonally or over a period of time, and your water usage rate may vary as well. Water characteristics can also differ considerably if your water filter is moved to a new location. For these reasons, we assume no liability for the determination of the proper equipment necessary to meet your requirements, and we do not authorize others to assume such obligations for us. Further, we assume no liability and extend no warranties, express or implied, for the use of this product with a non-potable water source. Our obligations under this warranty are limited to the repair or replacement of the failed parts of the water filter, and we assume no liability whatsoever for direct, indirect, incidental, consequential, special, general, or other damages.

Some states do not allow the exclusion of implied warranties or limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Similarly, some states do not allow the exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Consult your telephone directory for your local independently operated Culligan dealer, or write Culligan International Company for warranty and service information.

Culligan International Company

9399 W. Higgins Rd., Suite 1100
Rosemont, IL 60018 USA

1-800-CULLIGAN or 1-847-430-2800

www.culligan.com



Notes